

IPR-1G-HDMI and IPR-1G-SDI

IP to HDMI/SDI Mini-Converters



Installation and Operation Guide

Version 1.0
Published March 17, 2017



Notices

Trademarks

AJA® and Because it matters.® are registered trademarks of AJA Video Systems, Inc. for use with most AJA products. AJA™ is a trademark of AJA Video Systems, Inc. for use with recorder, router, software and camera products. Because it matters.™ is a trademark of AJA Video Systems, Inc. for use with camera products.

CION®, Corvid Ultra®, Io®, Ki Pro®, KONA®, KUMO®, ROI® and T-Tap® are registered trademarks of AJA Video Systems, Inc.

AJA Control Room™, KiStor™, Science of the Beautiful™, TruScale™, TruZoom™, V2Analog™ and V2Digital™ are trademarks of AJA Video Systems, Inc.

AirPort, Apple, Apple logo, AppleShare, AppleTalk, FireWire, iPod, iPod touch, Mac, Macintosh and ProRes, are registered trademarks of Apple Inc. Final Cut Pro, QuickTime and QuickTime logo are trademarks of Apple Inc.

Avid, Avid DNxHD and Media Composer are registered trademarks of Avid Technology, Inc.

Adobe is a registered trademark of Adobe Systems Incorporated in the United States and/or other countries.

HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC.

DVI is a registered trademark of DDWG.

TASCAM is a registered trademark of TEAC Corporation.

Dolby and the double-D Dolby logo are registered trademarks of Dolby Laboratories Licensing Corporation.

openGear® Ross, ROSS, ROSS®, and MLE are registered trademarks of Ross Video.

DashBoard Control System™ is a trademark of Ross Video.

All other trademarks are the property of their respective holders.

Copyright

Copyright © 2017 AJA Video Systems, Inc. All rights reserved. All information in this manual is subject to change without notice. No part of this document may be reproduced or transmitted in any form, or by any means, electronic or mechanical, including photocopying or recording, without the express written permission of AJA Video Systems, Inc.

Contacting AJA Support

When calling for support, have all information at hand prior to calling. To contact AJA for sales or support, use any of the following methods:

Telephone	+1.530.271.3190
FAX	+1.530.271.3140
Web	https://www.aja.com
Support Email	support@aja.com
Sales Email	sales@aja.com

Contents

Notices	2
Trademarks	2
Copyright	2
Contacting AJA Support	2
Chapter 1 – Introduction	4
Overview	4
Features	4
System Requirements	5
Simplified Block Diagram	5
I/O Connections	6
Ready, Lock, and LAN LED Behavior	6
Installation Overview	7
Initial IPR-1G-HDMI and IPR-1G-SDI Installation	8
Chapter 2 – eMini-Setup	9
Overview	9
Acquiring eMini-Setup	9
eMini-Setup Documentation	9
Installing eMini-Setup	10
PC Installation	10
Mac Installation	11
Running eMini-Setup	11
PC Startup	11
Mac Startup	12
Operating eMini-Setup	12
Control Network Tab Screen	13
Media Network Tab Screen	14
Update Tab Screen	15
Firmware Update Procedure	15
Info Tab Screen	16
Chapter 3 – IPR-1G-HDMI and IPR-1G-SDI Web Interface	17
Overview	17
Remote Control Overview	17
Networking Option – Using Only the Media LAN Port for Control and Media Settings	17
Web Browser via Ethernet	18
General Screen Information	18
Status Screen	20
Config Screen	20
Presets Screen	23
Presets Screen Controls	23
Network Screen	24
Firmware Screen	26
Downloading and Installing Updated Firmware	26
Bootting the IPR-1G from the Safeboot Firmware	26
Performing a Hard Reset	27
Appendix A – Specifications	29
IPR-1G-HDMI Tech Specs	29
IPR-1G-SDI Tech Specs	30
Appendix B – Safety and Compliance	31
Index	39

Chapter 1 – Introduction

Overview

AJA IP Mini-Converters are designed for point of use applications for the transport, reception and decoding of IP based video sources.

Rugged, compact and fanless, the IPR-1G-HDMI and IPR-1G-SDI Mini-Converters provide the bridge between Baseband and IP video for a range of applications, such as transporting video over IP to other remote facilities in post production, source monitoring, digital signage, and video walls. The IPR-1G Mini-Converters ease the cost of extensive monitoring distribution in a facility.

The IPR-1G units decode VSF TR-01 (and other JPEG 2000 formats), then formats the data for HDMI 1.4 or SDI output.

The audio associated with the video stream is extracted, synchronized, and then embedded into the HDMI or SDI signal as well as output on an analog RCA audio interface.

Features

IPR-1G-HDMI

- Converts VSF TR-01 and other JPEG 2000 over MPEG2-TS formats to HDMI
- Full size HDMI 1.4 video output including:
 - Deep Color 30- and 36-bit video per pixel (24-bit also supported)
 - 2 or 8 channels of embedded audio
- Audio embedded in HDMI
- HDMI cable supplied

IPR-1G-SDI

- Converts VSF TR-01 and other JPEG 2000 over MPEG2-TS formats to SDI
- SDI video output including 2 or 8 channels of embedded audio
- Audio embedded in SDI

Shared by Both Models

- Rugged, fanless design
- 1 x RJ-45 (IEC 60603-7) for 10/100/1000Base-T Ethernet Media Port
 - Media Port capable of controlling the unit
- Essence support: VSF TR-01 and other JPEG 2000 over MPEG2-TS workflows
- Additional 2 channel RCA analog audio output (User assignable channels)
- Full 10-bit pixel processing pipeline
- 1 x RJ-45 (IEC 60603-7) for 10/100/1000Base-T Ethernet Control Port
- Quick network setup with AJA eMini-Setup software
- Configuration via PC/Mac using USB port and supplied USB cable (eMini-Setup configuration software application available via download from AJA website)
- Uses universal input +5V power supply AJA model DWP-U-R1 (included)
- 5 year warranty

Software

- Built in web server for full remote control and configuration
- eMini-Setup software with a USB connection for initial configuration


System Requirements

Remote computer configuration and control is accomplished using the IPR-1G-HDMI and IPR-1G-SDI's internal web server. A Mac OSX or Windows computer with a web browser installed is all that is required. A USB port is also required for the initial configuration using eMini-Setup.

NOTE: Safari is the preferred web browser for control on the Mac, and additionally Chrome and Firefox on Windows. Other web browsers may work, but AJA cannot guarantee consistent operation for all web browsers or web browser versions.

Simplified Block Diagram

Figure 1. IPR-1G-HDMI and IPR-1G-SDI Simplified Block Diagram

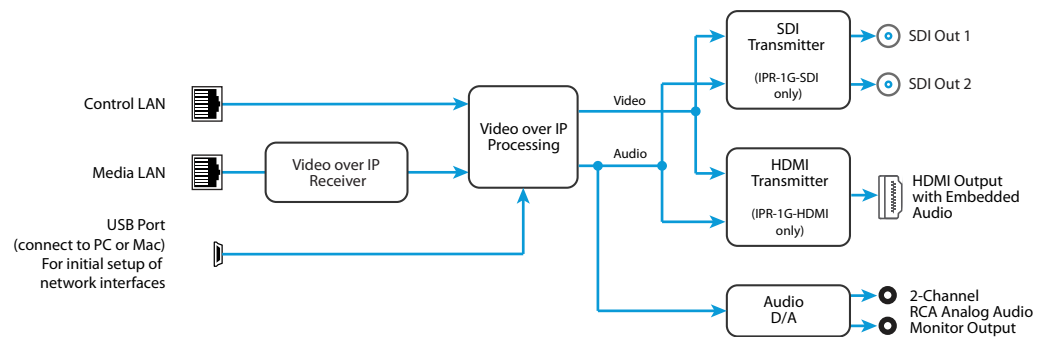

I/O Connections

Figure 2. IPR-1G-HDMI Connections



Figure 3. IPR-1G-SDI Connections



Ready, Lock, and LAN LED Behavior

The Ready LED illuminates green when the unit has finished powering up and is ready to use.

The Lock LED behavior is as follows:

- Off (indicating not locked) when no Program Clock Reference (PCR) has been received.
- Illuminated amber when in the process of locking (PCR has been received, but Phase-Locked Loop (PLL) and/or genlock are not yet locked).
- Illuminated green when the PLL and genlock are both locked.

NOTE: *Achieving locked status may take 5 or more minutes depending on network jitter behavior. The output of the unit will still function during the locking period.*

The Control LAN and Media LAN LEDs illuminate to indicate a link. Blinking indicates activity. Yellow and Green indicate a 10Mbps connection. Green only indicates a 100Mbps connection. Yellow only indicates a 1000Mbps connection.

Installation Overview

Detailed instructions are provided in [“Chapter 2 – eMini-Setup”](#) and [“Chapter 3 – IPR-1G-HDMI Web Interface.”](#) As an overview, however, IPR-1G installation typically consists of the following steps:

1. Apply power to the unit.
2. Determine its IP address (DHCP), or initially configure its network settings using eMini-Setup and a USB connection. This allows you to then access the unit’s user interface through a web browser.
3. Close the eMini-Setup application, and disconnect the USB cable.
4. Connect the unit to your Ethernet network. Use the Control LAN to make configuration changes. Use the Media LAN for the incoming video signal over IP stream.
5. Launch a web browser and access the IPR-1G using its IP address. Continue device configuration as needed from the web interface.
6. Connect the IPR-1G output.
7. Configure the IPR-1G basic operation.

The current IPR-1G configuration settings are retained, even when powered off, so subsequent installations for an identical decoding session can be done with the following simple steps:

1. Apply power to the IPR-1G unit.
2. Connect the unit to your network using the Control LAN and Media LAN and connect the unit’s output.

NOTE: *Two LAN connections to the unit are not necessarily required on an ongoing basis. If it is desirable for your installation, after the IPR-1G-HDMI or IPR-1G-SDI is set up, you can access all control parameters through the Media LAN with the appropriate network configuration. See [“Networking Option – Using Only the Media LAN Port for Control and Media Settings”](#) on page 17 for more information.*

NOTE: *The IPR-1G units pack an unprecedented feature set into a mini converter box. As a result, the units use approximately 12 watts of power. They will be very warm to the touch, which is normal. The units are engineered to operate across the full temperature range, from 0 to 40 degrees C.*

NOTE: *For highest reliability, the mini converters rely on convection cooling instead of using a built-in fan. Therefore, when installing the units, mount in a location where they have access to air for proper cooling. Do not stack the IPR-1G units with other mini converters.*

Initial IPR-1G-HDMI and IPR-1G-SDI Installation

Network Configuration

The IPR-1G units require a network connection to decode an IP stream. IPR-1G units are shipped from the factory with DHCP enabled, so if your network has a DHCP server, by simply connecting the IPR-1G to your network with an Ethernet cable, the DHCP server will assign the unit a compatible IP address.

IPR-1G units are shipped from the factory with UPnP (Universal Plug and Play) services enabled, so it is discoverable through Windows Explorer (for networked Windows PCs).

The eMini-Setup application, available as a free download from the AJA website, is used to identify the IPR-1G's current IP address, if configured, or to manually set the initial network configuration to work in your environment. Refer to [“Chapter 2 – eMini-Setup” on page 9](#) for information about installing and using AJA's eMini-Setup application.

Once configured and connected to your network, the IPR-1G is ready for decoding.

Chapter 2 – eMini-Setup

Overview

This chapter describes using the eMini-Setup application to initially communicate with and configure the IPR-1G over a direct USB connection. Once configured, the IPR-1G-HDMI or IPR-1G-SDI can be accessed via an Ethernet network using a web browser. Subsequently, that device can then be reconfigured over that network, using its IP address and built in web server.

NOTE: The eMini-Setup application is only used to setup selected Ethernet capable AJA devices, and cannot be used to connect to or setup other AJA Mini-Converters.

The general procedure is:

1. Acquire eMini-Setup from the AJA website and install the eMini-Setup application onto a computer.
2. Connect the IPR-1G-HDMI or IPR-1G-SDI to that computer's USB port.
3. Launch the eMini-Setup application.
4. Go to the Control Network tab and Media Network tab, where the IP address settings are displayed. You can use the existing DHCP assigned IP address, or it can be changed manually.
5. You can also use eMini-Setup to load firmware to the device, although this can also be done quickly and easily using the web browser interface.

Acquiring eMini-Setup

AJA's eMini-Setup application is available for download from the AJA website.

To download the latest eMini-Setup package, which includes the eMini-Setup application and documentation:

1. Go to:
<https://www.aja.com/family/software#eminisetup>
2. Click the link corresponding to the version you want to download for Mac or Windows.

eMini-Setup Documentation

Included with the eMini-Setup download is the AJA device's *Installation and Operation Guide*, which can be accessed from the eMini-Setup UI via the Help/Manual drop-down menu. This manual includes eMini-Setup information.

Documentation can also be accessed directly from the Mac eMini-Setup installer in the Documentation folder.

Documentation included with the eMini-Setup application is the version available at the time of distribution. However, AJA's documentation can be updated regularly, so newer versions may exist.

To download just the latest documentation, go to:

<https://www.aja.com/products/mini-converters/ip-converters>

Click the support button and open the Manuals link.


Installing eMini-Setup

PC Installation

To install eMini-Setup on a Windows PC:

1. Download the application from the AJA website. See [“Acquiring eMini-Setup” on page 9](#).
2. Open the AJA_eMini-Setup_win.zip file.
3. Double-click on the AJA_eMini-Setup.msi file.
4. The Setup Wizard will guide you through the installation.


Figure 4. eMini-Setup PC Wizard

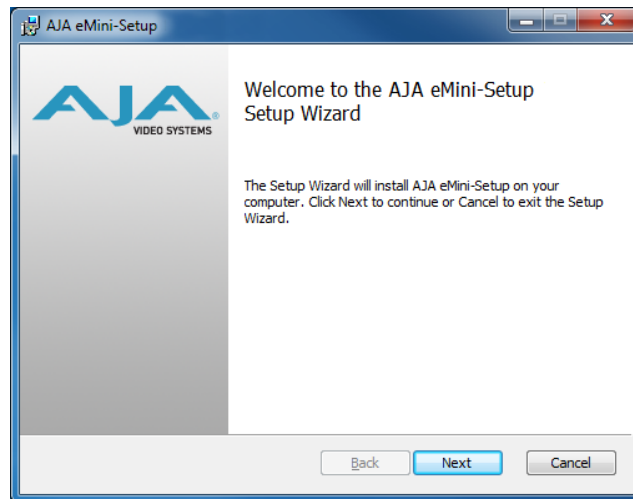

5. Click Next to begin. Answer the questions in the subsequent dialogues, including device software installation if displayed. When finished, an AJA eMini-Setup shortcut will be installed on the desktop, and you will be able to locate the eMini-Setup application in the AJA folder in the Programs listing.

NOTE: If the eMini-Setup application already exists on the PC, a different Setup Wizard appears.

Figure 5. eMini-Setup Wizard, Re-installation

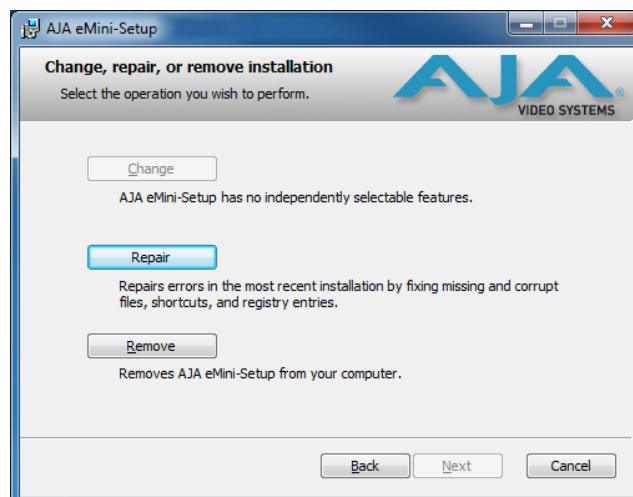

With this screen you can **Repair** (reinstall) or **Remove** (uninstall) eMini-Setup on the PC.


Mac Installation

To install the application on a Mac:

NOTE: Mac computers must be Intel-based (G5, G4 and earlier models will not work with eMini-Setup).

1. Download the application from the AJA website. See [“Acquiring eMini-Setup” on page 9](#).
2. Unzip the file.
3. Double-click on the AJA eMini-Setup.dmg file.
4. Answer the prompt and a utility program will be launched.

Figure 6. eMini-Setup Mac Installer

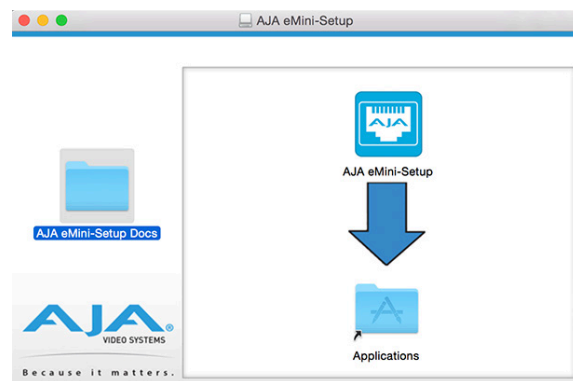


5. To complete the installation drag the “AJA eMini-Setup” icon to the Applications folder.

Running eMini-Setup

Connect your Ethernet capable AJA device to the PC or Mac via the supplied USB cable, and then connect the external power supply (supplied) to that AJA device.

PC Startup

To run eMini-Setup on a PC, double-click on the AJA eMini-Setup icon on your desktop, or open the AJA folder in the program list and click on the AJA eMini-Setup application located inside the eMini-Setup folder.

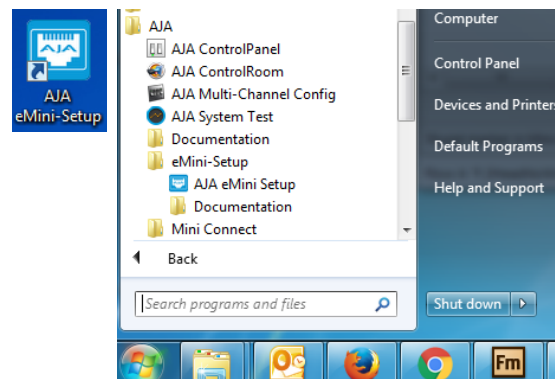


Mac Startup

To run eMini-Setup on a Mac, open the Applications folder and locate the AJA eMini-Setup application. Double-click the application to launch it.

Operating eMini-Setup

The eMini-Setup application provides a graphical user interface for viewing settings, modifying settings, and updating software.

Figure 7. Example eMini-Setup Screen

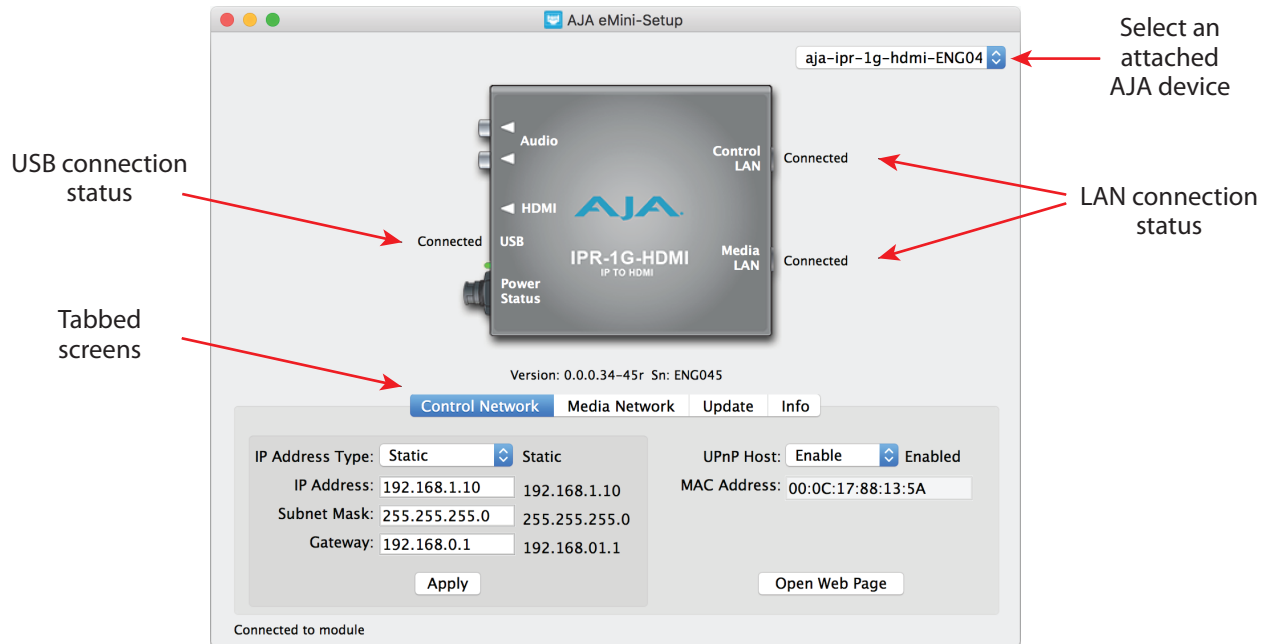

Selecting an AJA device from the pull down menu on the upper right causes eMini-Setup to connect to the selected AJA device.

Version - The version of firmware installed in the AJA device is displayed below the graphic.

Sn - This is the factory set unique serial number of your AJA device. If you ever call AJA Support for service, you may be asked for this number.


A status field at the bottom of the screen shows if the eMini-Setup application is connected and communicating with an AJA device.

File Menu - The File drop-down menu on the eMini-Setup application bar has a Revert to Factory Settings menu item that allows you to change the settings back to the AJA device's factory defaults.

Edit Menu - The Edit drop-down menu has standard Cut, Copy and Paste functions for editing text.

Help Menu - The Help drop-down menu has a link to the AJA device's manual.

Control Network Tab Screen

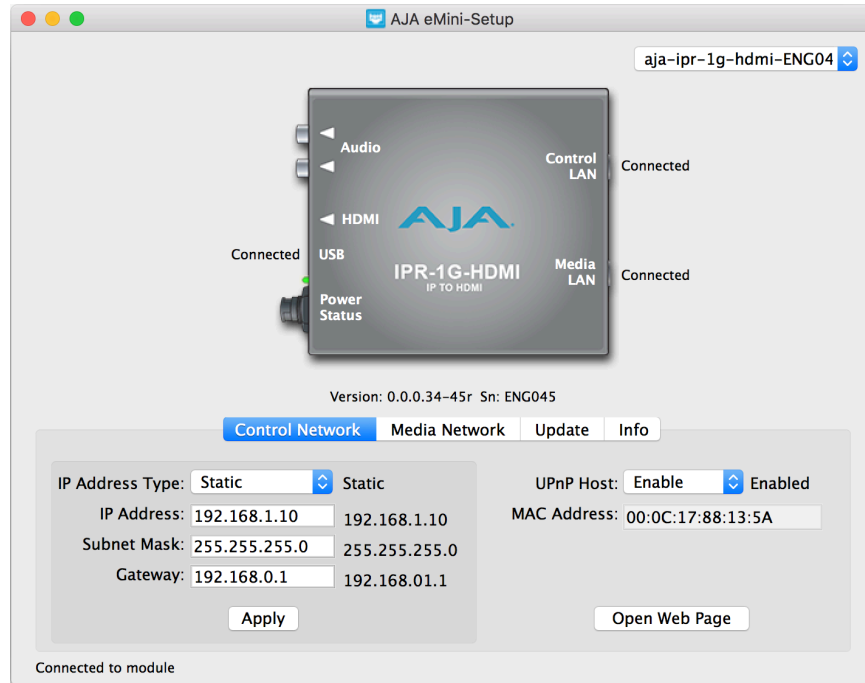

Use this Control Network tab to change the network setup on the connected AJA device. You must click the Apply button to initiate any network configuration changes.

IP Address Type - Choose from DHCP or Static IP Address.

IP Address - The current IP Address is displayed. A different IP address can be entered.

Subnet Mask - The current Subnet Mask is displayed. A different subnet mask can be entered.


Gateway - The current Gateway address is displayed. A different gateway address can be entered.

UPnP Host - Choose from Enable or Disable to control whether the AJA device makes itself visible for Bonjour and Windows network browsing.

MAC Address - This is the permanent MAC address of the Control LAN Ethernet port of the AJA device.

Open Web Page - Opens the IPR-1G web interface in a web browser.

Media Network Tab Screen

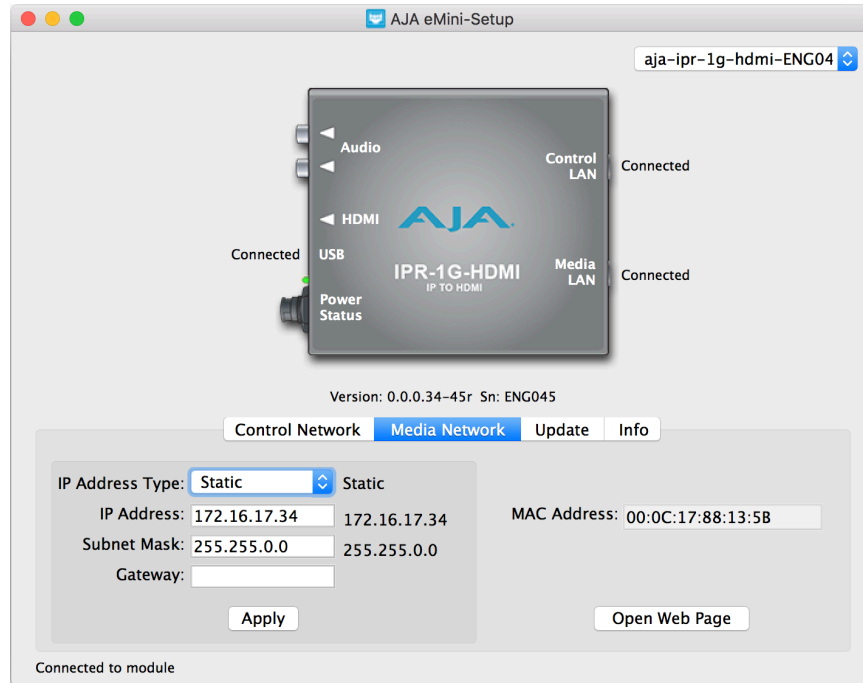

Use this Media Network tab to change the media network setup on the connected AJA device. You must click the Apply button to initiate any network configuration changes.

IP Address Type - Choose from DHCP or Static IP Address.

IP Address - The current IP Address is displayed. A different IP address can be entered.


Subnet Mask - The current Subnet Mask is displayed. A different subnet mask can be entered.

Gateway - The current Gateway address is displayed. A different gateway address can be entered. On the Media LAN, the gateway may be left blank. (A gateway is required on the Control LAN).

MAC Address - This is the permanent MAC address of the Media LAN Ethernet port of the AJA device.

Open Web Page - Opens the IPR-1G web interface in a web browser.

Update Tab Screen

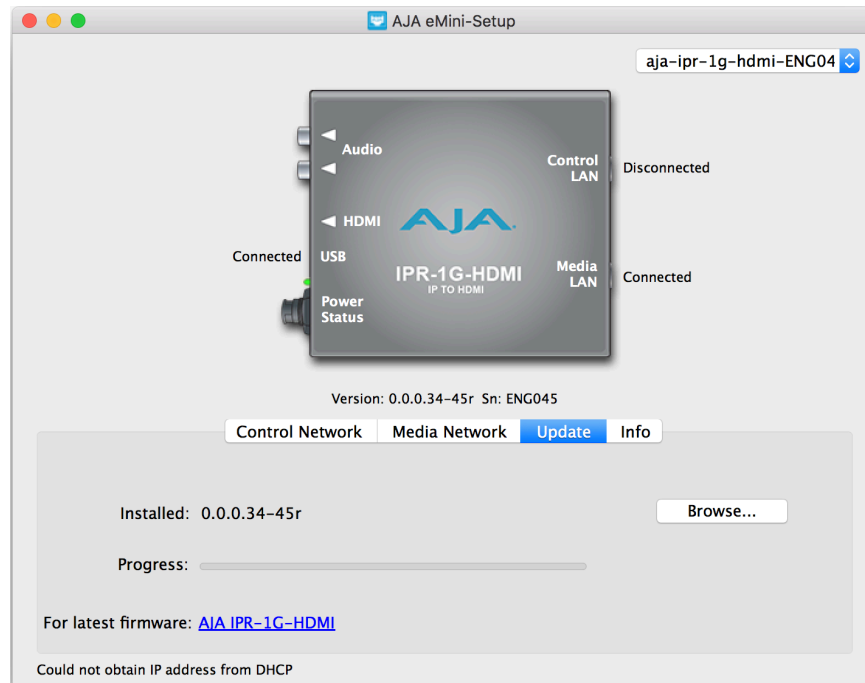

Use this Update tab to install new firmware.

Installed - This field shows the version of the firmware currently installed.

Browse - This button opens a navigation window, allowing you to select the firmware and load that version of firmware into the AJA device's non-volatile memory.


Progress - This indicator bar shows the progress of firmware installation.

Firmware Update Procedure

1. Check the AJA website for new firmware.
2. If new software is found, download it and uncompress the file archive (.zip).
3. Connect the device to a Mac or PC via a USB port on the computer.
4. Click the Update tab. Click the Browse button. Navigate to the firmware (.ajas extension), open it, and confirm the update. Progress will be shown via the "Progress" bar.
5. After the update, the AJA device must be rebooted by clicking on the Reboot button in the prompt window.

See also: "[Firmware Screen](#)" on page 26 regarding the process of working with firmware with the IPR-1G Web UI.

Info Tab Screen

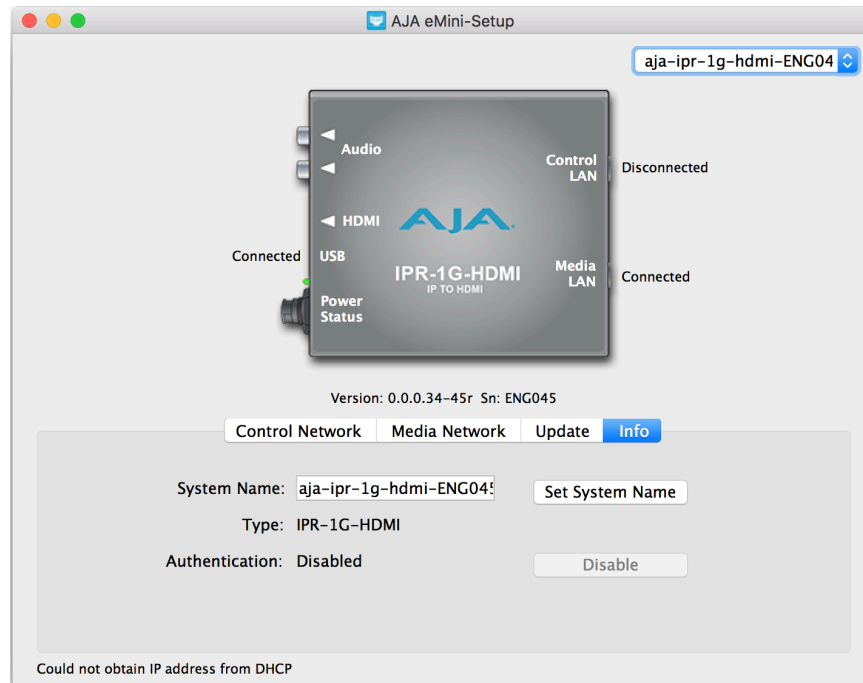

This tab provides basic information about the connected AJA device. This information is mostly useful when calling AJA Support for service or technical support.

System Name - This field allows you to give your AJA device a unique name. This can be useful if you have several attached to a Mac/PC via USB so you can distinguish between them easily.

Type - This is the factory set model name of the AJA device.

Authentication - If Authentication has been Enabled on the web browser Access tab, you can disable the security feature by clicking the Disable button.

Chapter 3 – IPR-1G-HDMI and IPR-1G-SDI Web Interface

Overview

Once you have established network connectivity with the IPR-1G, you can further configure and more fully control the unit through its web interface. Subsequently, eMini-Setup is no longer required to interface with the unit.

Remote Control Overview

An optimized web server in the IPR-1G allows remote control and parameter setting adjustments via a browser client running on a network wired computer. The network can be a closed local area network, a direct connection between the IPR-1G-HDMI or IPR-1G-SDI and a computer, or even exposed through a firewall to a WAN.

The IPR-1G units use a standard RJ-45 connector for the LAN connection. For 10/100 Mbps, the LAN connection uses Auto MDI-X. For 1000 Mbps, the LAN connection uses standard straight-through CAT 5 Ethernet cables or null-modem (cross-over) cables without any configuration or strapping required.

NOTE: Safari is the preferred web browser for control on the Mac, and additionally Chrome and Firefox on Windows. Other web browsers may work, but AJA cannot guarantee consistent operation for all web browsers or web browser versions.

To connect to the IPR-1G, attach the unit to your network and enter its IP address into the web browser. If authentication has been configured, you may need to enter a password.

Networking Option – Using Only the Media LAN Port for Control and Media Settings

It is an option to setup your network connection to the IPR-1G-HDMI or IPR-1G-SDI through an Ethernet switch so that only one Ethernet cable connects directly to the unit.

To implement this approach, follow these general steps:

1. Note the IP address of the unit's Media LAN port. This should be a static IP address.
2. Connect the controlling computer's Ethernet port that is being used to control the unit into an Ethernet switch. This requires disconnecting the Ethernet cable from the Control LAN port of the unit.
3. Connect the Media LAN port of the unit into the Ethernet switch.
4. Connect the source of the Media IP stream into the Ethernet switch.
5. Set the controlling computer's Ethernet port that is being used to control the IPR-1G to DHCP.
6. From the controlling computer, point a web browser to the IP address noted in step 1. The IPR-1G's web user interface displays in the browser.

Web Browser via Ethernet

General Screen Information

All IPR-1G-HDMI and IPR-1G-SDI web screens have certain areas and controls in common. Vertical and horizontal scroll bars appear when information extends past the border of a panel.

The round blue Up/Down arrow button on each panel and many status parameters opens and closes that pane or set of parameters.

Menu Panel

On the left of each screen is a Menu panel listing all the available screens. Click any of these links to jump to that screen.

Alarms Panel

Alarms are displayed in a panel on the left side of each screen. Clicking on the arrow opens or closes this panel to show or hide the alarms. Hovering the mouse over an alarm (red) or warning (yellow) may provide additional detail about the condition.

Connections Panel

On the right side of every screen is a Connection panel listing information for the connected IPR-1G.

Network Panel


Also on the right is a Network pane that lists other IPR-1Gs on the network. The gear icon opens the Network Screen, the same as selecting Network from the Menu Panel. Right clicking on the name of an IPR-1G-HDMI or IPR-1G-SDI in this list allows you to turn on the Identify feature, which will blink all four of the Ethernet LEDs of that device at a 1 second rate.

Parameters and Information

The rest of the screen displays all the parameter selections and information available for the selected IPR-1G screen.

Menu of Screens: Click one to display that screen.

S/N, software version and connection status

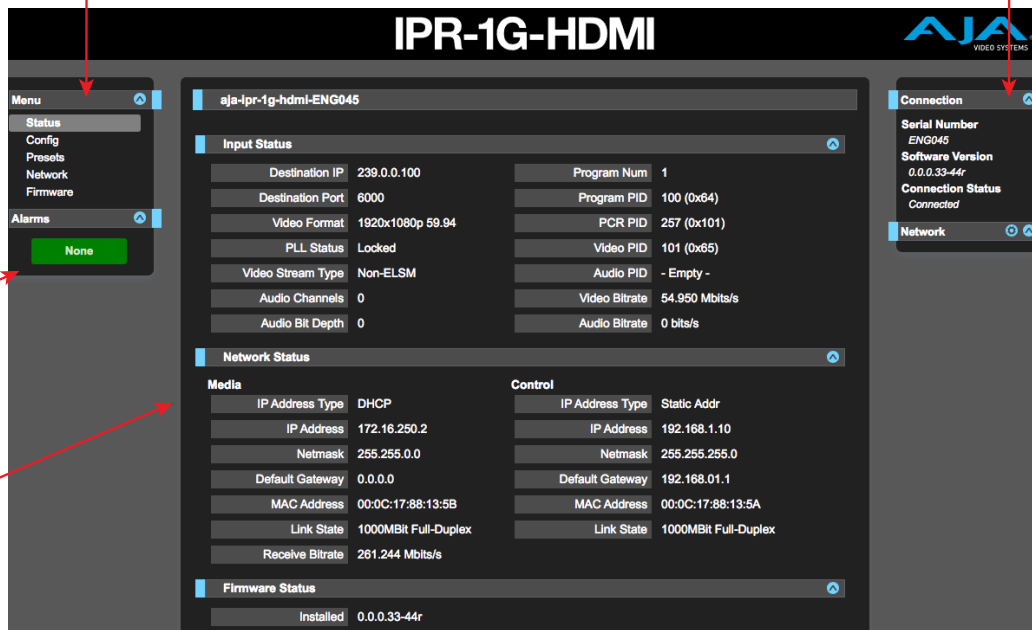


Alarms appear here

Selections and Information

Dynamic Controls

- Hovering the mouse on a parameter name displays a brief description of its function.
- From the Config Screen, right clicking on the parameter name resets just that parameter to its factory default.
- For values with sliders, fine control is achieved using the arrow keys on the keyboard to move the slider the minimum amount. The numeric value can also be clicked on to enter a specific value.

Status Screen

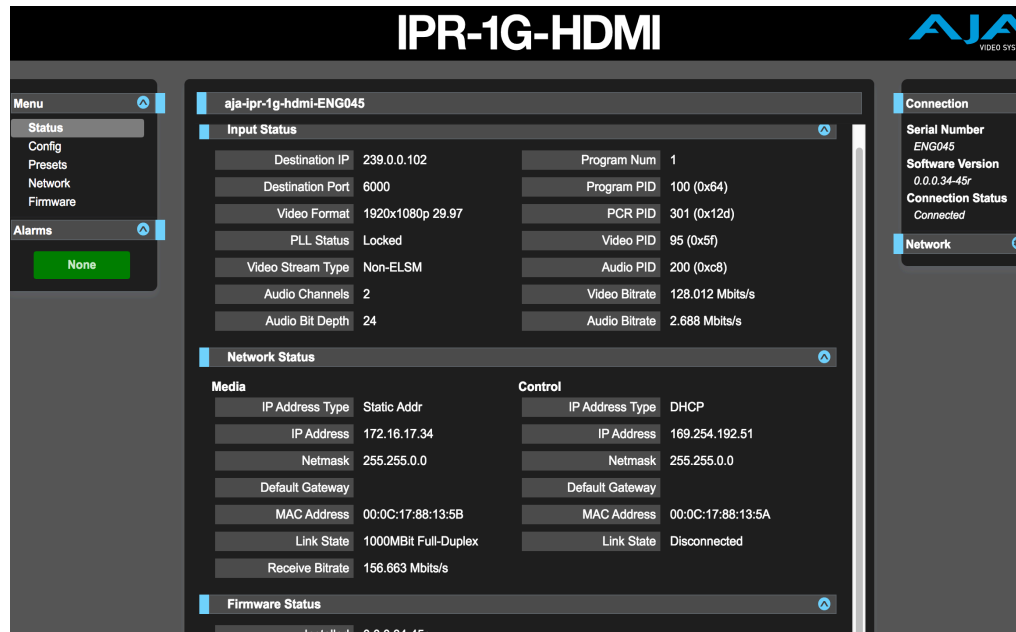


The Status screen reports the current status and settings for:

- Input Status
- Network Status
- Firmware Status

Each group of parameters can be opened or closed.

Config Screen

Figure 8. Config Screen 1 of 2

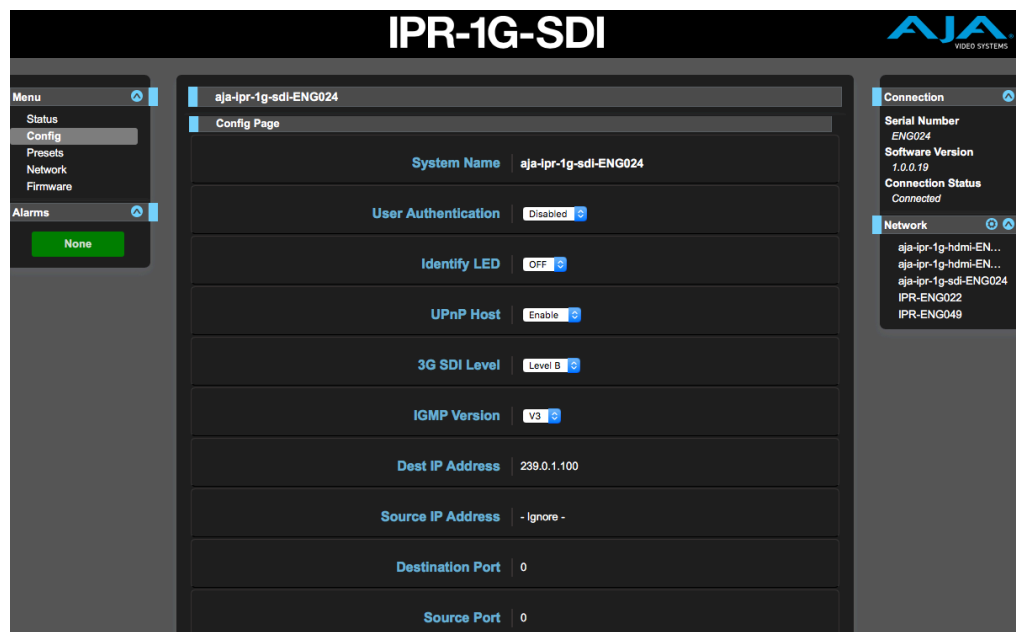

The Config Screen has the parameters required for IPR-1G general operation.

System Name - Defines a name for the system and gives it a unique identifier. This name is used when displaying systems through the web interface.

User Authentication - Enable or disable user password authentication for the web interface.

Identify LED - Enables flashing of the Ethernet LEDs on the unit.

UPnP Host - Enable or disable network discovery using Universal Plug and Play.

3G SDI Level - Select Level A or Level B for the SDI Output if it is 3G.

NOTE: 3G SDI Level applies only to IPR-1G-SDI.

IGMP Version - Internet Group Management Protocol Version.

NOTE: Selecting the wrong IGMP version for your network may cause long delays in processing multicast subscriptions. See your network engineer for more information.

Dest IP Address - (Required) The destination IP address of the stream.

- Default Value: 239.0.0.1

Source IP Address - (Optional) The source IP address of the stream.

- Default Value: 239.0.0.1
- An empty value implies the source IP address of packets is to be ignored.


Destination Port - (Optional) The UDP destination port of the stream.

- Value Range: 0 - 65535
- Default Value: 0
- A value of zero implies the destination port number of packets is to be ignored.

Source Port - (Optional) The UDP source port of stream.

- Value Range: 0 - 65535
- Default Value: 0
- A value of zero implies the source port number of packets is to be ignored.

Figure 9. Config Screen 2 of 2

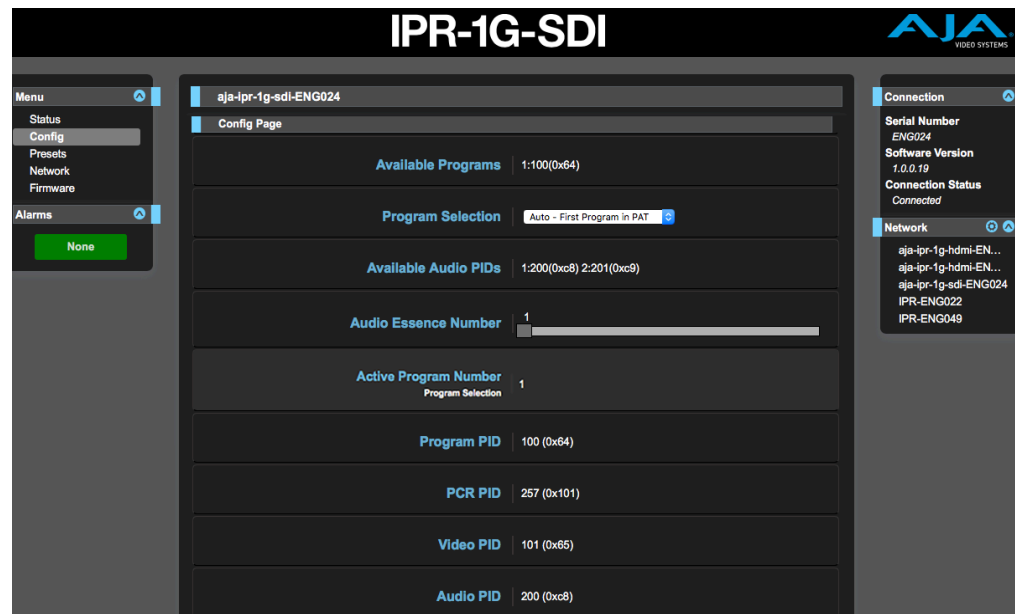

NOTE: The following is a list of acronyms used in this section of the Config Screen:

- Transport Stream (TS)
- Program Association Table (PAT)
- Program Map Table (PMT)

- Program Clock Reference (PCR)
- Packet Identifier Code (PID)

Available Programs - TS Programs available on the incoming stream.

Program Selection - Determines how the program to receive is selected.

- Auto - First Program in PAT
- Auto - Lowest Program Num
- Select Program Num
- Select Program PID
- Default: Auto - First Program in PAT

Available Audio PIDs - Reports the Audio PIDs that are available in the selected program.

Audio Essence Number - Select the audio number from the program.

- Value Range: 1 to 4
- Default Value: 1

Active Program Number - Reports the program number of the selected program. Shows "-1" when no program is active.

When **Program Selection** is set to "Select Program Num," the field **Program Number** displays with a slider control. Use the slider control to select the **Program Number**.

When **Program Selection** is set to "Auto - First Program in PAT" or "Auto - Lowest Program Num," **Active Program Num** displays the auto-selected Program Number and cannot be edited.

Program PID - Reports the PID of the selected program.

When the **Program Selection** is set to "Select Program PID," an editable **Program PID** field displays directly beneath **Program Selection**. Enter the Program PID of the desired Program, then press Return or Enter.

When the **Program Selection** is set to "Auto - First Program in PAT," "Auto - Lowest Program Num," or "Select Program Num," this field displays the auto-selected PID and cannot be edited.


- Value Range: 2 to 8190
- Default Value: 64

PCR PID - Reports the Program Clock Reference PID.

Video PID - Reports the PID of the selected video.

Audio PID - Reports the PID of the selected audio.

Presets Screen

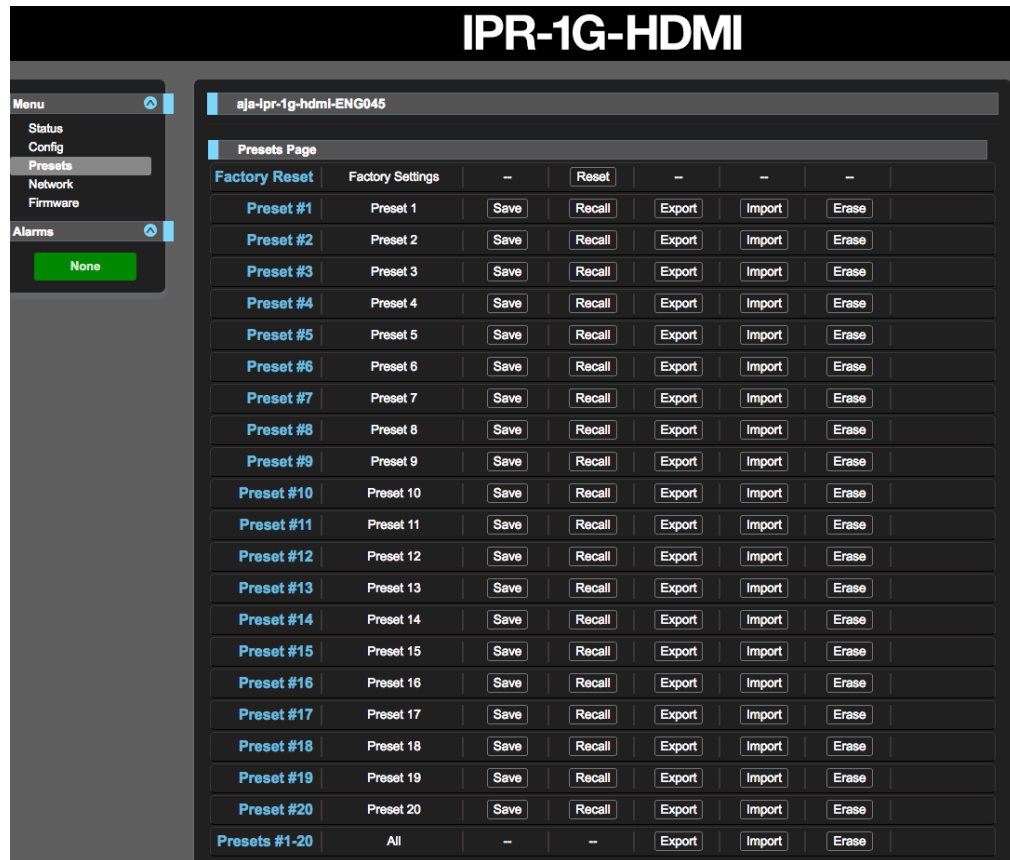

The Presets screen allows you to save IPR-1G Preset Configurations into 20 separate memory registers and recall the presets whenever needed.

The Presets screen also includes Export and Import functions that allow exporting one or all presets to your computer as files and importing exported preset files from your computer. A displayed message indicates successful or failed saves, recalls, exports, and imports.

Presets Screen Controls

Factory Reset - Factory Reset performs a soft reset, returning all the parameters on the Config Screen to their factory default values. Saved presets from the Presets page and parameters on the Network Screen's Control tab and Media tab are not affected.

See also: ["Performing a Hard Reset" on page 27.](#)

Recall - The Recall buttons recall the saved preset configurations.

CAUTION: When you recall a Preset Configuration, the recalled preset immediately replaces the system's existing configuration. All previous settings are lost unless you have previously stored them in another preset configuration or an exported file.

Store - The Store buttons let you save the current configuration into the preset register with the associated name and number. A preset is a set of all parameters as they were set at the time the preset was stored. Only editable parameters are saved in the presets. Non-editable parameters are not saved.

To change a preset name, click in the name's text field, type a new name, and press Enter to save the name. After entering text, you can click the mouse outside of the edit box to exit without changing the name.

CAUTION: IPR-1G-HDMI and IPR-1G-SDI stored presets may contain a web server access password. If you share an exported preset to someone, that person can extract the password. Before loaning the device to someone, or returning it as a rental, it is recommended that you clear the device of sensitive information.

Export - The Export buttons save the associated preset contents to a file on your computer. The file gets exported to the default download location specified in your browser options. The file name is the same as the preset name with the suffix `.presets`. If you export multiple files for the same preset, a number gets appended to ensure a unique file name. The file size is small, usually less than 100 kilobytes.

Import - The Import buttons let you browse for and import a preset file on your computer into the preset register associated with the selected button. A dialog box warns you that the operation will overwrite the current preset contents with the file contents. You can only import presets from an IPR-1G-HDMI or IPR-1G-SDI.

Erase - The Erase buttons erase the data in that preset.

Export Presets 1–20 (All) - Export All lets you save the contents of all presets to a file on your computer.

The file gets exported to the default download location specified in your browser options with the name `all.presets`. If you export multiple files, a number gets appended to ensure a unique file name.

Import Presets 1–20 (All) - Import All lets you browse for and import a previously exported `all.presets` file from your computer. A dialog box warns you that the operation will overwrite all 20 current preset contents with the contents stored in the file.

Erase Presets 1–20 (All) - Erase All erases all data from all the presets. A dialog box warns you that the operation will erase all 20 current presets.

Network Screen

Use the Network Screen: Control tab to configure or modify settings for the Control LAN Ethernet port.

The screenshot shows a 'Network Configuration' window with a 'Control' tab selected. The 'Media' tab is also visible. The 'IP Address Type' is set to 'Static'. The 'IP Address' is 192.168.1.10, the 'Netmask' is 255.255.255.0, and the 'Default Gateway' is 192.168.01.1. There is an 'Apply' button. The 'MAC Address' is 00:0C:17:88:13:5A and the 'Link State' is 1000MBit Full-Duplex.

Network Configuration	
Control	Media
IP Address Type: Static	
IP Address	192.168.1.10
Netmask	255.255.255.0
Default Gateway	192.168.01.1
Apply	
MAC Address	00:0C:17:88:13:5A
Link State	1000MBit Full-Duplex

Use the Network Screen: Media tab to configure or modify settings for the Media LAN Ethernet port.

The screenshot shows a 'Network Configuration' window with a 'Media' tab selected. The 'IP Address Type' is set to 'DHCP'. Below this, the 'IP Address' is 172.16.250.2, 'Netmask' is 255.255.0.0, and 'Default Gateway' is 0.0.0.0. The 'MAC Address' is 00:0C:17:88:13:5B and the 'Link State' is 1000MBit Full-Duplex.

The Network screen allows you to view and change your IPR-1G-HDMI or IPR-1G-SDI's network settings. Click Apply to activate any changes.

IP Address Type - IP Address Type determines the type of TCP/IP network configuration to be used. DHCP enables connecting to the network DHCP server, which assigns the IP Address, Netmask, and Gateway automatically. Static lets you set these parameters manually.

NOTE: If the IP Address Type is DHCP, the IP Address, Netmask, and Default Gateway are gray, indicating they are set automatically and cannot be changed unless IP Address Type is first set to Static. Changes are saved and activated upon confirmation using the Apply button.

- **DHCP** (default) - Selects automatic IP address assignment from the LAN DHCP server. If a DHCP server cannot be found, it fails over to the static IP address.
- **Static** - Assigns a static IP address manually. The factory default static IP address: 192.168.0.1.

IP Address - IP Address determines a static IP address to be used for TCP/IP networking. Consult your network administrator about how to set this value.

- If IP Address Type is set to DHCP, the IP address is set automatically by the network DHCP server and cannot be entered here.
- If IP Address Type is set to Static, enter an IP address compatible with your LAN here. Also enter a netmask and default gateway address in the following two parameters. Click Apply when you are ready to apply all three entries.
- If IP Address Type is set to DHCP and there is a DHCP failure, the IP address is set to the static IP address.

Netmask - Netmask determines the subnet mask to be used for TCP/IP networking.

- Enter a subnet mask compatible with your LAN. This is only needed for Static IP configurations. The factory default Subnet Mask is 255.255.255.0
- If IP Address Type is set to DHCP, the Subnet Mask is set by the DHCP server and cannot be changed by the user.

Default Gateway - Default Gateway determines the gateway or router used on your LAN for TCP/IP networking.

Without a properly configured default gateway (whether you have a router/gateway or not), your IPR-1G will be unable to see other IPR-1Gs on the network, although you may still be able to control this IPR-1G via a web browser. Also,


without a proper gateway defined, the discovery feature on the Network web page will not list other units on the network.

- Enter a default gateway or router address. This is only needed for Static IP configurations. The factory Default Gateway is 192.168.0.1.
- If IP Address Type is set to DHCP, the Default Gateway is set by the DHCP server and cannot be changed by the user.

MAC Address - Reports the connected IPR-1G's Media Access Control Address.

Link State - Reports the current status of the Ethernet connection.

Firmware Screen

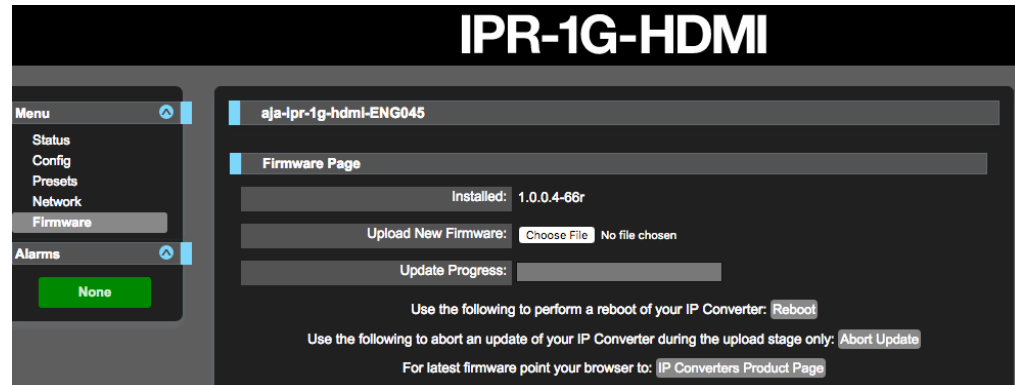

Downloading and Installing Updated Firmware

The Update Firmware screen allows you to download and install a firmware update from AJA.

To Download and Install Updated Firmware

1. Visit the AJA website (aja.com) to locate and download the updated software. The following page provides support information and will include links to locations where you can download updates:
<https://www.aja.com/products/mini-converters/ip-converters#support>
2. After downloading the software update to your local drive, use the Browse or Choose File button to locate the local software copy.
3. Follow the prompts to load the new firmware into your unit.
4. After the firmware has finished installing, reboot the unit by disconnecting power for a few seconds, then reconnecting power.

Booting the IPR-1G from the Safeboot Firmware

The IPR-1G units contain primary firmware and safeboot (secondary) firmware. To boot from the primary firmware, just cycle the unit's power.


In the event that the primary firmware becomes corrupted, you can boot the unit using the safeboot firmware.

To Boot from the Safeboot Firmware

1. Remove power from the device.


2. Using a very narrow tool, such as the end of a paper clip, press down and hold the recessed safeboot button, making sure you feel the button depress. The recessed safeboot button is located next to the Control LAN port.

Figure 10. Location of recessed safeboot button

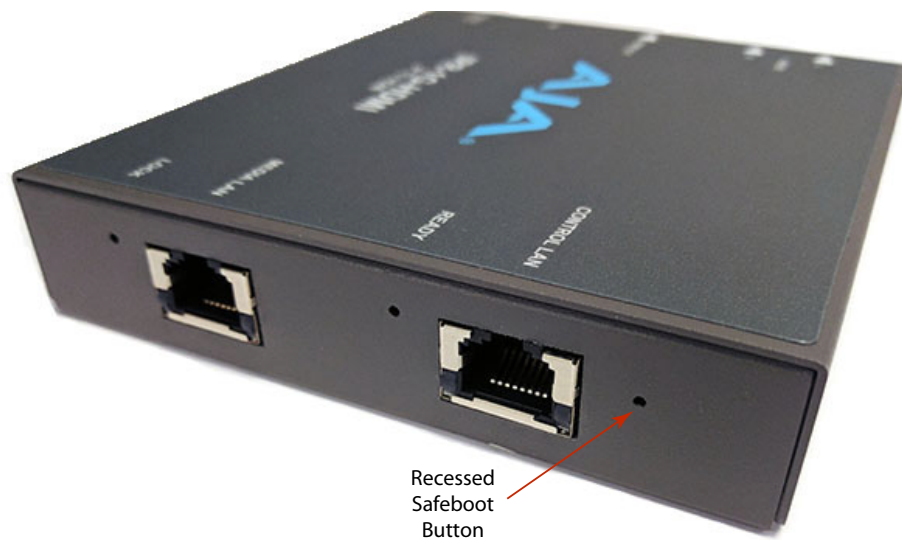

3. While keeping the safeboot button depressed, apply power, then continue holding down the safeboot button for three seconds.
4. Remove the paper clip from the safeboot button. The unit will boot from the safeboot firmware. After rebooting, the message "Safeboot" displays under the Alarms heading.


Figure 11. The Safeboot alarm message



5. Finally, update the firmware as described above under ["Downloading and Installing Updated Firmware" on page 26](#).

Following a successful firmware update and reboot, the message "None" displays under the Alarms heading.

Figure 12. The alarm message after a successful firmware update



Performing a Hard Reset

The hard reset resets all the Config Screen and Network parameters, disables authentication and clears the login password. It does not erase stored presets. However, you can manually delete stored presets using the Erase buttons on the Presets Screen.

NOTE: The hard reset is available on the IPR-1G-SDI. It is not yet available on the IPR-1G-HDMI.

To Perform a Hard Reset

1. Make sure the unit is fully powered up and functioning.
2. Using a very narrow tool, such as the end of a paper clip, press down and hold the recessed safeboot button for five seconds, making sure you feel the button depress. The recessed safeboot button is located next to the Control LAN port.
3. After five seconds, remove the paper clip from the safeboot button. The unit will undergo a hard reset.

Appendix A – Specifications

IPR-1G-HDMI Tech Specs

Video Formats

- (2K) 2048 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
- (HD) 1920 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
- (HD) 1920 x 1080i 25, 29.97
- (HD) 1280 x 720p 50, 59.94, 60
- (SD) 625i 25
- (SD) 525i 29.97

Essence Input

- 1 x RJ-45 (IEC 60603-7) for 10/100/1000Base-T Ethernet (IEEE 802.3-2012)
- VSF TR-01 and other J2K MPEG2-TS workflows

Outputs

- 1 x HDMI Standard Type A connector
 - HDMI v1.4a 24/30 bits per pixel, RGB/YUV
- 2 x RCA analog audio
 - Levels at -10dBV (nominal)

User Controls

- 1 x RJ-45 (IEC 60603-7) for 10/100/1000Base-T Ethernet (IEEE 802.3-2012)
 - HTTP/1.1 (RFCs 7230, 7231, 7232, 7233, 7234, 7235)
 - Web and REST clients supported
- 1 x USB 2.0 Mini-B (IEC 62680-1) connector
 - AJA eMini-Setup of network parameters

Size (w x d x h)

- 5.53" x 4.48" x 0.954" (140.462mm x 113.792mm x 24.232mm)

Weight

- 0.529 lb

Power

- Uses AJA power supply model DWP-U-R1, included with purchase
- 100-240V, 50/60 Hz Universal input
- +5 to 20V DC regulated, 12 watts max

Environment

- Safe Operating Temperature: 0 to 40 degrees C (32 to 104 degrees F)
- Safe Storage Temperature (Power OFF): -40 to 60 degrees C (-40 to 140 degrees F)
- Operating Relative Humidity: 10-90% noncondensing
- Operating Altitude: <3,000 meters (<10,000 feet)

NOTE: IPR-1G-HDMI uses approximately 12 watts of power and convection cooling. It will be very warm to the touch, which is normal. When installing the unit, mount in a location where it has access to air for proper cooling. Do not stack the IPR-1G-HDMI with other Mini-Converters.

IPR-1G-SDI Tech Specs

Video Formats

- (2K) 2048 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
- (HD) 1920 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
- (HD) 1920 x 1080i 25, 29.97
- (HD) 1280 x 720p 50, 59.94, 60
- (SD) 625i 25
- (SD) 525i 29.97

Essence Input

- 1 x RJ45 (IEC 60603-7) for 10/100/1000Base-T Ethernet (IEEE 802.3-2012)
- VSF TR-01 and other J2K MPEG2-TS workflows

Outputs

- 2 x 3G SDI BNC
 - 4:2:2 10-bits/pixel
- 2 x RCA analog audio
 - Levels at -10dBV (nominal)

User Controls

- 1 x RJ-45 (IEC 60603-7) for 10/100/1000Base-T Ethernet (IEEE 802.3-2012)
- HTTP/1.1 (RFCs 7230, 7231, 7232, 7233, 7234, 7235)
- Web and REST clients supported
- 1 x USB 2.0 Mini-B (IEC 62680-1) connector
- AJA eMini-Setup of network parameters

Size (w x d x h)

- 5.53" x 4.48" x 0.954" (140.462mm x 113.792mm x 24.232mm)

Weight

- 0.6 lb (0.3 kg)

Power

- Uses AJA power supply model DWP-U-R1, included with purchase
- 100-240V, 50/60 Hz Universal input
- +5 to 20V DC regulated, 12 watts max

Environment

- Safe Operating Temperature: 0 to 40 degrees C (32 to 104 degrees F)
- Safe Storage Temperature (Power OFF): -40 to 60 degrees C (-40 to 140 degrees F)
- Operating Relative Humidity: 10-90% noncondensing
- Operating Altitude: <3,000 meters (<10,000 feet)

NOTE: IPR-1G-SDI uses approximately 12 watts of power and convection cooling. It will be very warm to the touch, which is normal. When installing the unit, mount in a location where it has access to air for proper cooling. Do not stack the IPR-1G-SDI with other Mini-Converters.

Appendix B – Safety and Compliance

Federal Communications Commission (FCC) Compliance Notices

Class A Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15, Subpart B of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Canadian ICES Statement

Canadian Department of Communications Radio Interference Regulations

This digital apparatus does not exceed the Class A limits for radio-noise emissions from a digital apparatus as set out in the Radio Interference Regulations of the Canadian Department of Communications. This Class A digital apparatus complies with Canadian ICES-003.

Règlement sur le brouillage radioélectrique du ministère des Communications

Cet appareil numérique respecte les limites de bruits radioélectriques visant les appareils numériques de classe A prescrites dans le Règlement sur le brouillage radioélectrique du ministère des Communications du Canada. Cet appareil numérique de la Classe A est conforme à la norme NMB-003 du Canada.

European Union and European Free Trade Association (EFTA) Regulatory Compliance

This equipment may be operated in the countries that comprise the member countries of the European Union and the European Free Trade Association. These countries, listed in the following paragraph, are referred to as The European Community throughout this document:

AUSTRIA, BELGIUM, BULGARIA, CYPRUS, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, FRANCE, GERMANY, GREECE, HUNGARY, ICELAND, IRELAND, ITALY, LATVIA, LICHENSTEIN, LITHUANIA, LUXEMBOURG, MALTA, NETHERLANDS, NORWAY, POLAND, PORTUGAL, ROMANIA, SLOVAKIA, SLOVENIA, SPAIN, SWEDEN, SWITZERLAND, UNITED KINGDOM

Declaration of Conformity

Marking by this symbol indicates compliance with the Essential Requirements of the EMC Directive of the European Union 2014/30/EU.



This equipment meets the following conformance standards:

Safety

EN 60065: 2002 + A1: 2006 + A11: 2008 + A2: 2010 + A12: 2011 (GS License)

IEC 60065: 2001 + A1: 2005 + A2: 2010 (CB Scheme Report/Certificate)

Additional licenses issued for specific countries available on request.

Emissions

EN 55032: 2012, CISPR 22: 2008, EN 61000-3-2: 2014, EN 61000-3-3: 2013

Immunity

EN 55103-2: 2009, EN 61000-4-2:2009, EN 61000-4-3:2006+A1:2008+A2:2010,

EN 61000-4-4:2004+A1:2010, EN 61000-4-5:2006, EN 61000-4-6:2009, EN 61000-4-11:2004

Environments: E2, E3 and E4

The product is also licensed for additional country specific standards as required for the International Marketplace.



Warning! This is a Class A product. In a domestic environment, this product may cause radio interference, in which case, the user may be required to take appropriate measures.

Achtung! Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten, in welchen Fällen der Benutzer für entsprechende Gegenmaßnahmen verantwortlich ist.

Attention! Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées..

Recycling Notice



This symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.

Korean KCC Compliance Statement

A급 기기 (업무용 방송통신기자재)	이 기기는 업무용(A급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.
Class A (Broadcasting Communication Equipment for Office Use)	As an electromagnetic wave equipment for office use (Class A), this equipment is intended to use in other than home area. Sellers or users need to take note of this.

Taiwan Compliance Statement

警告使用者：

這是甲類的資訊產品，在居住的環境中使用時，可能會造成射頻干擾，在這種情況下，使用者會被要求採取某些適當的對策。

This is a Class A product based on the standard of the Bureau of Standards, Metrology and Inspection (BSMI) CNS 13438, Class A. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Japanese Compliance Statement

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A

This is a Class A product based on the standard of the VCCI Council (VCCI V-3/2015.04). If this equipment is used in a domestic environment, radio interference may occur, in which case, the user may be required to take corrective actions.

Translated Warning and Caution Messages

The following caution statements, warning conventions, and warning messages apply to this product and manual.



Warning Symbol



Caution Symbol

Before Operation Please Read These Instructions



Warning! Read and follow all warning notices and instructions marked on the product or included in the documentation.

Avertissement! Lisez et conformez-vous à tous les avis et instructions d'avertissement indiqués sur le produit ou dans la documentation.

Warnung! Lesen und befolgen Sie die Warnhinweise und Anweisungen, die auf dem Produkt angebracht oder in der Dokumentation enthalten sind.

¡Advertencia! Lea y siga todas las instrucciones y advertencias marcadas en el producto o incluidas en la documentación.

Aviso! Leia e siga todos os avisos e instruções assinalados no produto ou incluídos na documentação.

Avviso! Leggere e seguire tutti gli avvisi e le istruzioni presenti sul prodotto o inclusi nella documentazione.



Warning! Do not use this device near water and clean only with a dry cloth.

Avertissement! N'utilisez pas cet appareil près de l'eau et nettoyez-le seulement avec un tissu sec..

Warnung! Das Gerät nicht in der Nähe von Wasser verwenden und nur mit einem trockenen Tuch säubern.

¡Advertencia! No utilice este dispositivo cerca del agua y límpielo solamente con un paño seco.

Aviso! Não utilize este dispositivo perto da água e limpe-o somente com um pano seco.

Avviso! Non utilizzare questo dispositivo vicino all'acqua e pulirlo soltanto con un panno asciutto.



Warning! Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.

Avertissement! Ne bloquez aucune ouverture de ventilation. Suivez les instructions du fabricant lors de l'installation.

Warnung! Die Lüftungsöffnungen dürfen nicht blockiert werden. Nur gemäß den Anweisungen des Herstellers installieren.

¡Advertencia! No bloquee ninguna de las aberturas de la ventilación. Instale de acuerdo con las instrucciones del fabricante.

Aviso! Não obstrua nenhuma das aberturas de ventilação. Instale de acordo com as instruções do fabricante.

Avviso! Non ostruire le aperture di ventilazione. Installare in conformità con le istruzioni del fornitore.



Warning! Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

Avertissement! N'installez pas l'appareil près d'une source de chaleur telle que des radiateurs, des bouches d'air de chauffage, des fourneaux ou d'autres appareils (amplificateurs compris) qui produisent de la chaleur.

Warnung! Nicht in der Nähe von Wärmequellen wie Heizkörpern, Heizregistern, Öfen oder anderen Wärme erzeugenden Geräten (einschließlich Verstärkern) aufstellen.

¡Advertencia! No instale cerca de fuentes de calor tales como radiadores, registros de calor, estufas u otros aparatos (incluidos amplificadores) que generan calor.

Aviso! Não instale perto de nenhuma fonte de calor tal como radiadores, saídas de calor, fogões ou outros aparelhos (incluindo amplificadores) que produzam calor.

Avviso! Non installare vicino a fonti di calore come termosifoni, diffusori di aria calda, stufe o altri apparecchi (amplificatori compresi) che emettono calore



Warning! Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

Avertissement! La sécurité de la prise polarisée ou de la prise de type mise à la terre ne doit en aucun cas être empêchée de fonctionner. Une prise polarisée a deux broches, l'une étant plus large que l'autre. Une prise de type mise à la terre a deux broches et une troisième broche pour la mise à la terre. La broche large ou la troisième broche sont fournies pour votre sécurité. Si la prise fournie ne s'insère pas dans votre prise femelle, consultez un électricien pour le remplacement de la prise femelle obsolète.

Warnung! Der Sicherheitszweck des gepolten bzw. Schukosteckers ist zu berücksichtigen. Ein gepolter Stecker verfügt über zwei Pole, von denen einer breiter als der andere ist. Ein Schukostecker verfügt neben den zwei Polen noch über einen dritten Pol zur Erdung. Der breite Pol bzw. der Erdungspol dienen der Sicherheit. Wenn der zur Verfügung gestellte Stecker nicht in Ihren Anschluss passt, konsultieren Sie einen Elektriker, um den veralteten Anschluss zu ersetzen.

¡Advertencia! No eche por tierra la finalidad del tipo de enchufe polarizado con conexión a tierra. Un enchufe polarizado tiene dos espigas, una más ancha que la otra. Un enchufe con conexión a tierra tiene dos espigas iguales y una tercera espiga que sirve para la conexión a tierra. La espiga ancha, o la tercera espiga, sirven para su seguridad. Si el enchufe suministrado no encaja en el tomacorriente, consulte con un electricista para reemplazar el tomacorriente obsoleto.

Aviso! Não anule a finalidade da segurança da ficha polarizada ou do tipo ligação terra. Uma ficha polarizada tem duas lâminas sendo uma mais larga do que a outra. Uma ficha do tipo de ligação à terra tem duas lâminas e um terceiro terminal de ligação à terra. A lâmina larga ou o terceiro terminal são fornecidos para sua segurança. Se a ficha fornecida não couber na sua tomada, consulte um electricista para a substituição da tomada obsoleta.

Avviso! Non compromettere la sicurezza della spina polarizzata o con messa a terra. Una spina polarizzata ha due spinotti, di cui uno più largo. Una spina con messa a terra ha due spinotti e un terzo polo per la messa a terra. Lo spinotto largo o il terzo polo sono forniti per motivi di sicurezza. Se la spina fornita non si inserisce nella presa di corrente, contattare un elettricista per la sostituzione della presa obsoleta.



Warning! Since the Mains plug is used as the disconnection for the device, it must remain readily accessible and operable.

Avertissement! Puisque la prise principale est utilisée pour débrancher l'appareil, elle doit rester aisément accessible et fonctionnelle.

Warnung! Da der Netzstecker als Trennvorrichtung dient, muss er stets zugänglich und funktionsfähig sein.

¡Advertencia! Puesto que el enchufe de la red eléctrica se utiliza como dispositivo de desconexión, debe seguir siendo fácilmente accesible y operable.

Aviso! Dado que a ficha principal é utilizada como a desconexão para o dispositivo, esta deve manter-se prontamente acessível e funcional.

Avviso! Poiché il cavo di alimentazione viene usato come dispositivo di sconnessione, deve rimanere prontamente accessibile e operabile.



Warning! Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the device.

Avertissement! Protégez le cordon d'alimentation pour que l'on ne marche pas dessus ou qu'on le pince, en particulier au niveau des prises mâles, des réceptacles de convenance, et à l'endroit où il sort de l'appareil.

Warnung! Vermeiden Sie, dass auf das Netzkabel getreten oder das Kabel geknickt wird, insbesondere an den Steckern, den Steckdosen und am Kabelausgang am Gerät.

¡Advertencia! Proteja el cable de energía para que no se le pise ni apriete, en especial cerca del enchufe, los receptáculos de conveniencia y el punto del que salen del equipo.

Aviso! Proteja o cabo de alimentação de ser pisado ou de ser comprimido particularmente nas fichas, em tomadas de parede de conveniência e no ponto de onde sai do dispositivo.

Avviso! Proteggere il cavo di alimentazione in modo che nessuno ci cammini sopra e che non venga schiacciato soprattutto in corrispondenza delle spine e del punto in cui esce dal dispositivo.



Warning! Unplug this device during lightning storms or when unused for long periods of time.

Avertissement! Débranchez cet appareil pendant les orages avec éclairs ou s'il est inutilisé pendant de longues périodes.

Warnung! Das Gerät ist bei Gewitterstürmen oder wenn es über lange Zeiträume ungenutzt bleibt vom Netz zu trennen.

¡Advertencia! Desenchufe este dispositivo durante tormentas eléctricas o cuando no se lo utilice por largos periodos del tiempo.

Aviso! Desconecte este dispositivo da tomada durante trovoadas ou quando não é utilizado durante longos períodos de tempo.

Avviso! Utilizzare soltanto i collegamenti e gli accessori specificati e/o venduti dal produttore, quali il treppiedi e l'esoscheletro.



Warning! Refer all servicing to qualified service personnel. Servicing is required when the device has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the device, the device has been exposed to rain or moisture, does not operate normally, or has been dropped.

Avertissement! Référez-vous au personnel de service qualifié pour tout entretien. L'entretien est exigé quand l'appareil a été endommagé de quelque manière que ce soit, par exemple lorsque le cordon d'alimentation ou la prise sont endommagés, que du liquide a été versé ou des objets sont tombés dans l'appareil, que l'appareil a été exposé à la pluie ou à l'humidité, ne fonctionne pas normalement ou est tombé.

Warnung! Das Gerät sollte nur von qualifizierten Fachkräften gewartet werden. Eine Wartung ist fällig, wenn das Gerät in irgendeiner Weise beschädigt wurde, wie bei beschädigtem Netzkabel oder Netzstecker, falls Flüssigkeiten oder Objekte in das Gerät gelangen, das Gerät Regen oder Feuchtigkeit ausgesetzt wurde, nicht ordnungsgemäß funktioniert oder fallen gelassen wurde.

¡Advertencia! Consulte al personal calificado por cuestiones de reparación. El servicio de reparación se requiere cuando el dispositivo ha recibido cualquier tipo de daño, por ejemplo cable o espigas dañadas, se ha derramado líquido o se han caído objetos dentro del dispositivo, el dispositivo ha sido expuesto a la lluvia o humedad, o no funciona de modo normal, o se ha caído.

Aviso! Remeta todos os serviços de manutenção para o pessoal de assistência qualificado. A prestação de serviços de manutenção é exigida quando o dispositivo foi danificado mediante qualquer forma, como um cabo de alimentação ou ficha que se encontra danificado/a, quando foi derramado líquido ou caíram objectos sobre o dispositivo, quando o dispositivo foi exposto à chuva ou à humidade, quando não funciona normalmente ou quando foi deixado cair.

Avviso! Fare riferimento al personale qualificato per tutti gli interventi di assistenza. L'assistenza è necessaria quando il dispositivo è stato danneggiato in qualche modo, ad esempio se il cavo di alimentazione o la spina sono danneggiati, è stato rovesciato del liquido è stato rovesciato o qualche oggetto è caduto nel dispositivo, il dispositivo è stato esposto a pioggia o umidità, non funziona correttamente o è caduto



Warning! Do not open the chassis. There are no user-serviceable parts inside. Opening the chassis will void the warranty unless performed by an AJA service center or licensed facility.

Avertissement! Ne pas ouvrir le châssis. Aucun élément à l'intérieur du châssis ne peut être réparé par l'utilisateur. La garantie sera annulée si le châssis est ouvert par toute autre personne qu'un technicien d'un centre de service ou d'un établissement agréé AJA.

Warnung! Öffnen Sie das Gehäuse nicht. Keine der Geräteteile können vom Benutzer gewartet werden. Durch das Öffnen des Gehäuses wird die Garantie hinfällig, es sei denn, solche Wartungsarbeiten werden in einem AJA-Service-Center oder einem lizenzierten Betrieb vorgenommen.

¡Advertencia! No abra el chasis. El interior no contiene piezas reparables por el usuario. El abrir el chasis anulará la garantía a menos que se lo haga en un centro de servicio AJA o en un local autorizado.

Advertência! Não abra o chassi. Não há internamente nenhuma peça que permita manutenção pelo usuário. Abrir o chassi anula a garantia, a menos que a abertura seja realizada por uma central de serviços da AJA ou por um local autorizado.

Avvertenza! Non aprire lo chassis. All'interno non ci sono parti riparabili dall'utente. L'apertura dello chassis invaliderà la garanzia se non viene effettuata da un centro ufficiale o autorizzato AJA.



Warning! Disconnect the external AC power supply line cord(s) from the mains power before moving the unit.

Avertissement! Retirez le ou les cordons d'alimentation en CA de la source d'alimentation principale lorsque vous déplacez l'appareil.

Warnung! Trennen Sie die Wechselstrom-Versorgungskabel vom Netzstrom, bevor Sie das Gerät verschieben.

¡Advertencia! Cuando mueva la unidad desenchufe de la red eléctrica el/los cable(s) de la fuente de alimentación CA tipo brick.

Advertência! Remova os cabos CA de alimentação brick da rede elétrica ao mover a unidade.

Avvertenza! Scollegare il cavo dell'alimentatore quando si sposta l'unità.



Warning! Only use attachments and accessories specified and/or sold by the manufacturer.

Avertissement! Utilisez seulement les attaches et accessoires spécifiés et/ou vendus par le fabricant.

Warnung! Verwenden Sie nur Zusatzgeräte und Zubehör angegeben und / oder verkauft wurde durch den Hersteller.

¡Advertencia! Utilice solamente los accesorios y conexiones especificados y/o vendidos por el fabricante.

Aviso! Utilize apenas equipamentos/acessórios especificados e/ou vendidos pelo fabricante.

Avviso! Utilizzare soltanto i collegamenti e gli accessori specificati e/o venduti dal produttore.

Index

A

- AJA Support 2
- Audio 4
 - 2 Channel RCA Analog Audio Output 4, 29
 - 2 or 8 Channels of Embedded Audio 4
 - Audio Essence Number 22
 - Audio PID 22
 - Embedded in HDMI 4
 - Embedded in SDI 4
 - RCA Analog Audio Output 4
- Authentication 17
 - Disabling 16
 - Enabling or Disabling 21

B

- Block Diagram 5

C

- Cable
 - CAT 5 Ethernet 17
 - Cross-Over 17
 - Disconnecting USB Cable 7
 - Ethernet 8, 17
 - HDMI Cable Supplied 4
 - USB Cable Supplied 4, 11
- Compliance 31
- Config Screen 20
- Configuration
 - Initial 5, 7, 8, 9

D

- Decoding 4, 7, 8
- DHCP
 - Assigned IP Address 9
 - Controlling Computer's Ethernet Port 17
 - Enabled 8
 - Failure 25
 - IP Address 7, 13, 14
 - Server 8
 - Setting IP Address Type for Media LAN Port 25

E

- eMini-Setup 4, 5, 7, 8, 9
 - Acquiring 9
 - Documentation 9
 - Downloading 9
 - Installing 10
 - Operating 12
 - Running 11
 - Screen 12

F

- Features 4

Firmware

- Corrupted 26
- Downloading 26
- Installing New 15
- Loading 9
- Safeboot 26
- Screen, Web UI 26
- Status 20
- Update Procedure 15
- Updating from Web UI 26
- Version Installed 12

H

HDMI

- 1.4 Output 4
- Conversion from VSF TR-01 and Other JPEG 2000 Formats 4
- Embedded Audio 4

I

Installation

- eMini-Setup on Mac 11
- eMini-Setup on Windows 10
- Initial 8
- Of Firmware Using eMini-Setup 15
- Overview 7

I/O Connections 6

IP Address 17

- Accessing Settings Through eMini-Setup 9
- Applying Changes with eMini-Setup 13
- Assigning from DHCP Server 25
- Assigning Static 25
- Choosing DHCP or Static with eMini-Setup 13
- Destination 21
- Determining 7, 8
- Determining Type in Web UI 25
- DHCP Server Assigning 8
- Factory Default Static 25
- Media LAN Port 17
- Source 21
- Using to Access Web UI 9, 17

L

LAN

- Auto MDI-X 17
- Behavior of Control LAN LEDs 7
- Behavior of Media LAN LEDs 7
- Connecting Unit to Network with Control LAN and Media LAN 7
- Entering Compatible IP Address 25
- Using Control LAN to Make Configuration Changes 7

- Using Media LAN for Control and Media 7, 17
- Using Media LAN for Incoming Media 7
- Using Standard RJ-45 Connector 17
- Using Straight-Through CAT 5 Ethernet Cables 17
- Using Web UI Network Screen to Access Control LAN Port Settings 24
- Using Web UI Network Screen to Access Media LAN Port Settings 25

LED Behavior

- Ready, Lock and LAN 6

N

Network Configuration

- Accessing Control and Media Parameters Through Media LAN Only 7
- Initial Installation 8
- IP Address Type 25

Network Screen

- Configuring Settings for Control LAN Ethernet Port 24
- Configuring Settings for Media LAN Ethernet Port 25

O

Overview

- eMini-Setup 9
- Installation 7
- Remote Control 17
- Web Interface 17

P

Presets

- Changing Name 24
- Erasing 24
- Exporting 23, 24
- File Name Suffix 24
- Importing 24
- Recalling 23
- Register 23
- Saving 23
- Screen 23
- Screen Controls 23

R

- Remote Control 5
 - Overview 17

Reset

- Hard 27
- Soft 23
- RJ-45 4, 29
- Connector 17

S

Safety and Compliance 31

SDI

3G SDI Level 21

Embedded Audio 4

Output 4

Serial Number 12

Specifications 29

Technical 29

Status

eMini-Setup Application 12

Ethernet Connection 26

Firmware 20

Input 20

Network 20

Screen 20

Subnet Mask

Determined by Netmask 25

eMini-Setup 13, 14

Factory Default 25

Accessing User Interface 7

Loading Firmware 9

Preferred 5

System Requirements 5

Web Server

Access Password 24

Built In 5, 9, 17

Unit's Internal 5

T

Technical Support 2

U

Update

Firmware Screen 26

Updated

Documentation 9

Updated Software

Downloading 26

Update Procedure

Firmware 15

Update Tab 15

Installing New Firmware 15

USB Cable 4

Running eMini-Setup 11

USB Connection

Working with eMini-Setup 7

USB Port 4

Connecting to Unit from

Controlling Computer 9

Firmware Update Procedure 15

Required for Initial Configuration

Using eMini-Setup 5, 9

User Authentication

Enabling or Disabling for Web
Interface 21

V

VSF TR-01

Converting 4

Decoding 4

Essence Input 29

Essence Support 4

W

Web Browser

Accessing Unit Through Its IP

Address 7, 9